

Multibio – 900

Visible Light Facial & Fingerprint Recognition



Face



Finger



MiFare



WiFi



TCP/IP



Access Control

Visible Light Indoor Facial Recognition

Storage Capacity

Face Capacity	3,000
Finger Capacity	10,000
Card Capacity	3,000
Password Capacity	3,000
Log Capacity	2,00,000
Max User	3,000

Features

Speedy recognition to avoid long queue

Large display with easy handling features

Dual camera for live body sensing & observation


Camera support low light and normal light

Auto ON/OFF Energy saving light

Access control to secure your premises

Strong metal build quality with Negligible maintenance

Multiple authentication modes like face, fingerprint & card

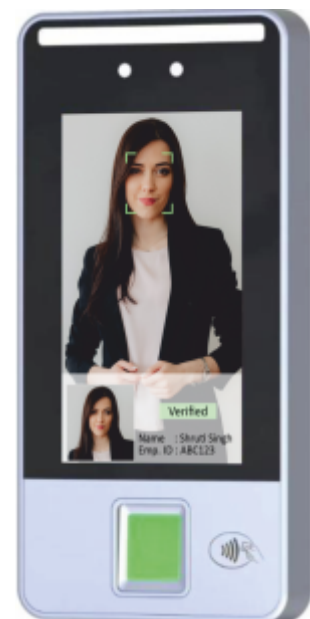

Multibio - 900

Communication Interface

Communication	WiFi, TCP/IP, USB
---------------	-------------------

Biometric

OS	Linux
Recognition distance	0.5-1 meters
Fingerprint Sensor	500 DPI Optical Sensor
FAR	0.00001%
FRR	0.001%
RF Card Options	13.56 Mhz Mifare

Audio/Visual

LCD Display	4.3" RGB Capacitive touch screen
Camera	2 MP Binocular camera
Voice instruction	16-Bit Hi-Fi Voice
Resolution	480*272 Pixel
IP Rating	IP65 Water and Dust resistance

Access Control

Wiegand	Out
Relay	Yes
Exit Reader	Wiegand Output, Remote Push Button, No Touch

Power & Enviroment

Operating Temperature	-20°C - + 60 °C
Power	DC 12V / 2A
Dimension	185 x 90 x 23.8 mm
Working humidity	10% - 90%



Auto Focus



low light Verification



Long Distance Verification

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on

 BiomaxOfficial  BioMax Security
 biomaxsecurity  BioMax Access Control