


N-F22

LIFT UP STYLE QUOTIENT



N-FR12
(Optional)

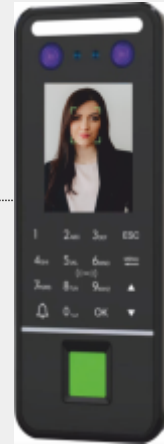

Face



Finger



Palm



Wi-Fi



LAN



USB



Access Control

Visible Light Indoor Facial Recognition

Storage Capacity

Face Capacity	1,500
Palm Capacity	500
Finger Capacity	5,000
Card Capacity	1,500
Max. User	1,500
Log Capacity	2,00,000

Features

- Speedy recognition to avoid long queue
- Dual camera for live body sensing & observation
- Feather touch keypad for intuitive operation
- Slim access control to secure your premises
- Multiple authentication modes like Face, Palm & Fingerprint



N-F22

"N-F22 tops the list in matter of style and decency it adds to your place."

N-F22

Communication Interface

Communication	Wi-Fi, TCP/IP, USB
---------------	--------------------

Biometric

Push Data	Yes
Sensor type	500 DPI
FAR	0.01%
FRR	0.001%
OS	Linux
Verification Time	<=1 second
RF card options	13.56MHz & 125Khz

Audio/Visual

Keypad	Feather Touch Keypad
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Wiegand In & Out	Yes
Relay	Yes
Anti Passback	Yes
Access Control Function	Auxilury Input, Multi-identification mode
Exit Reader	N-FR12, Wiegand Reader, Push Button, No Touch , Bell

Power & Enviroment

Operating Temperature	0°C ~ 45°C
Power	DC 12V / 2A
Dimension	185 x 72 x 25 mm



Auto Focus

1 meter



Long Distance Verification



Unaffected by High
Temperatures 0° ~ 45°

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control