



N-ProFace Maximizing Limits



Face



Finger



RFID



WiFi



LAN



USB



Access Control

Multi-Bio Attendance and Access Control

Storage Capacity

Face Capacity	10,000
Finger Capacity	30,000
Card Capacity	10,000
Max User	10,000
Log Capacity	2,00,000

Features

High-Speed and Accurate Face Identification

Good adaptation for dry, moist and rough fingerprints.


Output relay for door open.

Face, Fingerprint, Card, Password authentication

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive SDK is available for development and integration.

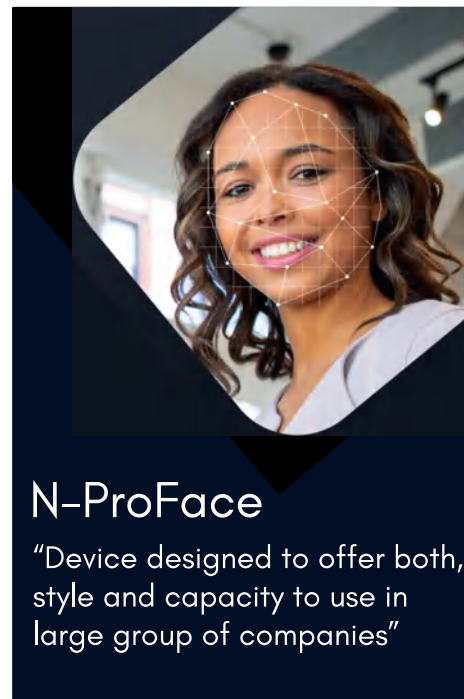

N-ProFace

"Device designed to offer both, style and capacity to use in large group of companies"

N-ProFace

Communication Interface

Communication	WiFi, TCP/IP, USB
---------------	-------------------

Biometric

Push Data	YES
Sensor type	500 DPI
FAR	0.01%
FRR	0.001%
Processor	1GHz
Verification time	<=1 second
RF card options	125kHz EM (Standard) / 13.56MHz Mifare (Optional)

Audio/Visual

LCD	4.3" Touch screen 320x240 pixel
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Wiegand in & out	YES
Relay	YES
Support	RS485 Reader, Wiegand Reader, No Touch, Remote Push Button
Standard Access Control Function	Time Zone, Anti-passback Multi-identification Duress mode

Power & Environment

Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Dimension	210 x 90 x 55 mm



Auto Focus



low light Verification



Long Distance Verification

Software

Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service



Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control