



N-SC403 Pro Beat The Biometrics



RFID



Password



LAN



Mini USB



Access Control



WiFi

RFID Attendance and Access Control

Storage Capacity

Card Capacity	50,000
Max User	50,000
Password	50,000
Log Capacity	2,00,000

Features

RFID & Password Identification


Accepting Card from 1 to 5 cm.

Less than 1 sec. card reading speed.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

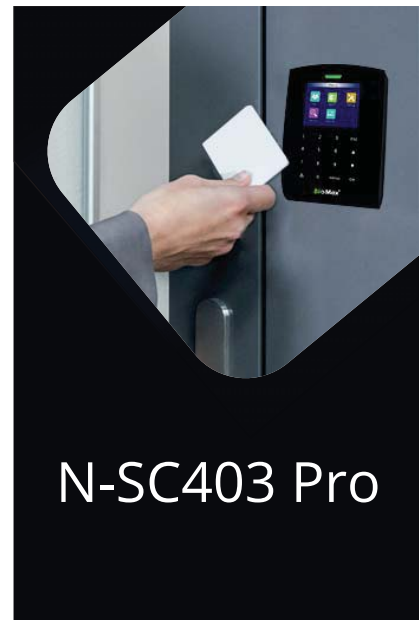

N-SC403 Pro

N-SC403 Pro

Communication Interface

Communication	WiFi, TCP/IP & Mini USB
---------------	-------------------------

Biometric

Push Data	YES
FAR	0.00001%
FRR	0.001%
CPU	High speed industrial processor
Verification Time	<=1 second
RF card options	125kHz EM / 13.56MHz Mifare (Optional)
OS	Linux

Audio/Visual

LCD	2.4" TFT color screen
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Access control

Relay	YES
Support Reader	Wiegand Reader, Bell Wireless Remote, Push Button, No Touch Sensor.

Power & Environment

Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Dimension (L*H*W)	95 x 125 x 45 mm



WiFi, TCP/IP & Mini USB



Unaffected by High
Temperatures 0° ~ 50°



Highly reliable & durable.

Software Desktop, Web, Cloud



Time Attendance



Access Control



Employee Self Service




Mobile App

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com

Connect with us on



 BiomaxOfficial

 BioMax Security

 biomaxsecurity

 BioMax Access Control