



V-AX14 DYNAMIC IN EVERY WAY



Finger



RFID



WiFi



LAN



USB



Access Control

Fingerprint Time Attendance and Access Control

Storage Capacity

Finger Capacity	3000
Card Capacity	3000
Max User	3000
Password	3000
Log Capacity	1,00,000

Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication


output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

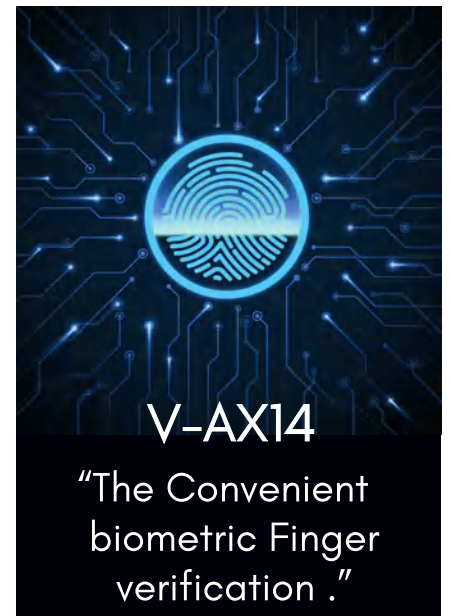

V-AX14

Communication Interface

Communication	TCP/IP, WiFi,
	RS232/485, USB Host & Client

Biometric

Push Data	YES
Scheduled Bell	YES
FAR	0.00001%
FRR	0.001%
SSR	YES
Verification time	<=1 second
RF card options	Mifare Card (Optional)



Accepts moist and rough Finger



Accepts Color & Mahendi Finger



Compact & lightweight design



Unaffected by High Temperatures -20°C ~ 50°C

Audio/Visual

LCD	3" Widescreen High Definition TFT Display
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

Software

Desktop, Web, Cloud

Access control

Relay	YES
Support	V-R12, Wiegand Reader, Push Button, Remote, No Touch



Time Attendance



Access Control



Employee Self Service



Mobile App

Power & Environment

Operating Temperature	-20°C ~ 50°C
Power	DC 12V, 2Amp
Dimension	168 x 130 x 37mm

Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control

Disclaimer : Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

www.biomaxsecurity.com