

## V-AX27

Poe Loaded, Ultimate



Finger



RFID



POE



LAN



Feather Touch Keypad



Access Control

## Fingerprint Time Attendance and Access Control

### Storage Capacity

Finger Capacity	3000
Card Capacity	3000
Max User	3000
Password	3000
Log Capacity	50,000

### Features

High-Speed and Accurate Fingerprint Identification

Fingerprint, Card, Password authentication


output relay for door open.

Good adaptation for dry, moist and rough fingerprints.

Supremely low Electric energy consumption.

Highly reliable and durable.

Comprehensive software development kit(SDK) is available for development and integration.

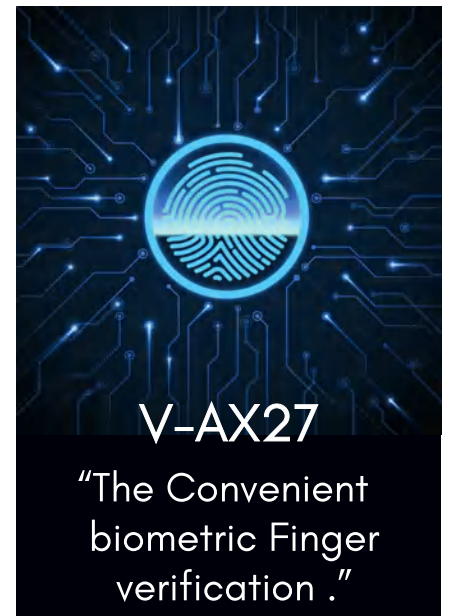

# V-AX27

## Communication Interface

Communication	TCP/IP, Rs485
---------------	---------------

## Biometric

Keypad	Feather Touch Keypad
Sensor type	500 DPI
FAR	0.00001%
FRR	0.001%
POE	Standard IEEE802.3af
Verification time	<=1 second
RF card options	Mifare Card (Optional)



Accepts moist and rough Finger



Accepts Color & Mahendi Finger



Compact & lightweight design



Unaffected by High Temperatures -20°C ~ 50°C

## Audio/Visual

Display	128*64 OLED
Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

## Access control

Relay	YES
Support	V-R12, Wiegand Reader, Push Button, Remote, No Touch

## Power & Enviroment

Operating Temperature	-20°C ~ 50°C
Power	DC 12V , 2Amp
Dimension	54(w)*170(h)*41(d)mm

### Software

#### Desktop



Time Attendance



Access Control



Employee Self Service




Mobile App

**Disclaimer :** Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by    

[www.biomaxsecurity.com](http://www.biomaxsecurity.com)

### Connect with us on

 BiomaxOfficial  BioMax Security  
 biomaxsecurity  BioMax Access Control