




## N-Access 10

### Fingerprint Access Control System

#### Storage Capacity

Finger Capacity	500
Card Capacity	500
Code Count(password)	2
Verification time	<=1.5 Second
Relay	Yes
FAR	0.00001%
FRR	0.001%
Door Controlled	1
Linking mode	Offline
Power Source	12Dc/1.5Amp
Display	Black-White LCD screen
Verification Mode	Fingerprint, Card, Password
Operating temperature	0°C ~ 45°C
Dimensions	86x86x26mm

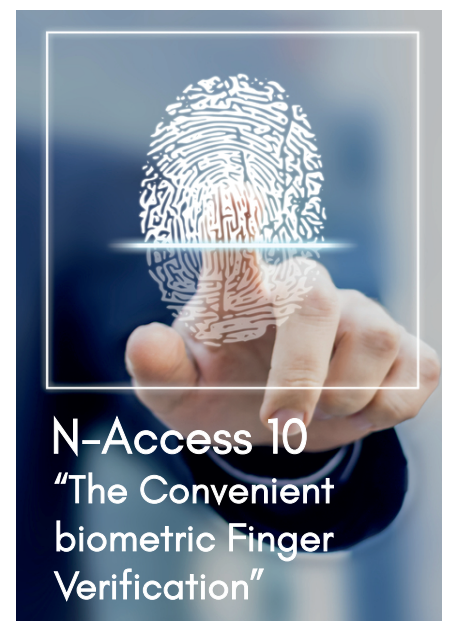

# N-Access 10

## Biometric

FAR	0.0001%
FRR	0.001%
Sensor type	500 DPI
Verification time	<=1.5 second
RF card options	Proximity
OS	RTOS

## Audio/Visual

Voice instruction	16-bit Hi-Fi voice & sound indication
Language	English

## Access control

Relay	Yes
Support	Push Button, No Touch, Remote

## Power & Enviroment

Operating Temperature	0°C ~ 50°C
Power	12V DC / 2A
Inbuilt Battery Backup	Yes



Accepts moist and rough Finger



Access Control



Unaffected by High Temperatures 0° ~ 50°

**Disclaimer :** Brief specifications are mentioned here. specification may change without prior notice. Customers are advised to check with us before purchase. Actual product may differ slightly to that depicted for ongoing product development.

Certified by



[www.biomaxsecurity.com](http://www.biomaxsecurity.com)

Connect with us on



BiomaxOfficial



BioMax Security



biomaxsecurity



BioMax Access Control